

Explorer® DX12

Typical Plus System Setup

Peripherals

Seon System

Vehicle Electrical Interface

Power On/Off for Wifi bridge
External Power for IR options
Alarm 0 Wake On Function
Supports 12 Cameras



Smart-Reach® Mobile (Wi-Fi) *2



Laptop *2




LCD Monitor*3




GPS Receiver*4

Diagnostic Indicator/
Alarm Button

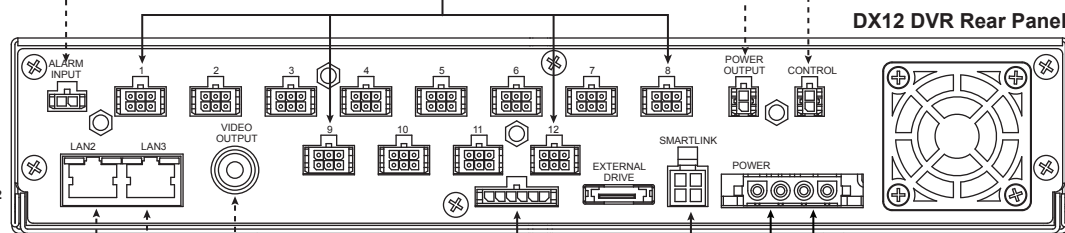


Seon internal
use only


POWER

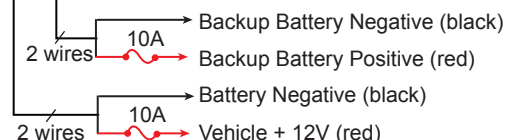


SPEED



ALARMS

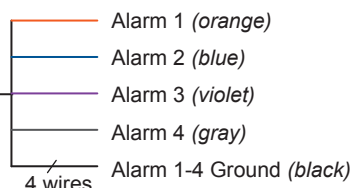

SIGNALS

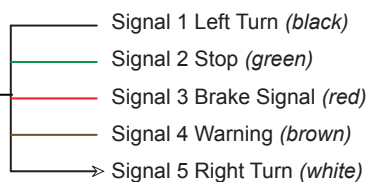

IGNITION



Legend:

----- Connection to optional equipment

*1 The remote microphone requires an optional camera harness if the camera connected to Camera 1 (or Camera 2) does not have a microphone.

*2 An optional Smart-reach Wi-Fi or Laptop can be used from the Ethernet output located on the front or back panel.

*3 An optional LCD Monitor can be used from the video output located on the front or back panel.

*4 For speed tracking, use a GPS receiver or an optional speed harness. For ease of installation and better speed tracking, Seon recommends using a GPS receiver.